



ZTE – 4G LTE


MiFi router Installation for Windows

Insert USIM card

- Turn on the router
- Click on WPS button 2 times to reveal the wireless key
- Connect Laptop to Router
- Open the browser and enter the following address: **192.168.0.1**
- Enter the password: admin and click **login**



Click on **Settings**

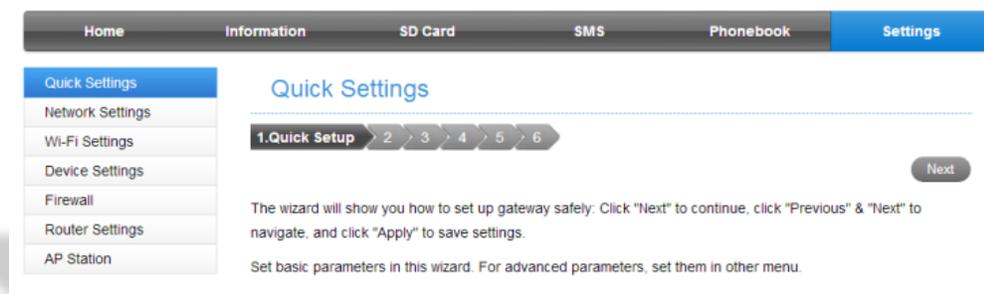



Choose APN

Home Information SD Card SMS Phonebook Settings

Quick Settings
Network Settings
Dial-up Settings
Network Selection
APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

APN

Current APN Alfa 3G+

Mode Auto Manual

Profile Alfa 3G+

PDP Type IPv4

Profile Name * Alfa 3G+

IPv4 APN * internet.mic1.com.lb

IPv4 DNS Mode Auto Manual

IPv4 Authentication NONE

IPv4 User Name mic1

IPv4 Password ****

Click on **Manual**, then **Add New**

Home Information SD Card SMS Phonebook Settings

Quick Settings
Network Settings
Dial-up Settings
Network Selection
APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

APN

Current APN Alfa 3G+

Mode Auto Manual

Profile Default [Add New](#)

PDP Type IPv4

Profile Name * Default

IPv4 APN * Default

IPv4 DNS Mode Auto Manual

IPv4 Authentication NONE

IPv4 User Name

IPv4 Password



Enter the below info

- **Profile Name:** Alfa LTE
- **IPv4 APN:** usb.mic1.com.lb
- **IPv4 Authentication:** PAP
- Click **APPLY**

Home Information SD Card SMS Phonebook Settings

Quick Settings
Network Settings
 > Dial-up Settings
 > Network Selection
 > APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

APN

Current APN Alfa 3G+

Mode Auto Manual

Profile Default

PDP Type IPv4

Profile Name * Alfa LTE

IPv4 APN * usb.mic1.com.lb

IPv4 DNS Mode Auto Manual

IPv4 Authentication PAP

IPv4 User Name

IPv4 Password

Under **Manual**, Choose **Alfa LTE**

- Click **Set as Default**

Home Information SD Card SMS Phonebook Settings

Quick Settings
Network Settings
 > Dial-up Settings
 > Network Selection
 > APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

APN

Current APN Alfa 3G+

Mode Auto Manual

Profile Alfa LTE

PDP Type IPv4

Profile Name * Alfa LTE

IPv4 APN * usb.mic1.com.lb

IPv4 DNS Mode Auto Manual

IPv4 Authentication PAP

IPv4 User Name

IPv4 Password



Click on **Network Selection**

- Under **Automatic**, choose **LTE Only**

Home Information SD Card SMS Phonebook **Settings**

Quick Settings
Network Settings
Dial-up Settings
Network Selection
APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

Network Selection

Network Selection Automatic Manual

Automatic
Automatic
4G Only
3G Only
2G Only

Apply

Dial Up Settings

- Under **WAN Connection Mode**, choose **Automatic**
- Wait for few seconds and the connection will be established

Home Information SD Card SMS Phonebook **Settings**

Quick Settings
Network Settings
Dial-up Settings
Network Selection
APN
Wi-Fi Settings
Device Settings
Firewall
Router Settings
AP Station

Dial-up Settings

WAN Connection Mode Automatic Manual

Check here, you can connect to internet in the roaming status.

Apply